

Tile & Stone Floor Performance Testing

*Professional Consultants
PROCON provides specialized
technical consulting and equipment
for conducting in-situ performance
testing of ceramic tile and stone floor
assemblies in accordance with
ASTM C627 test protocol, also
known as Robinson Floor Testing*

Applicable industry standards
ASTM C 627

SERVICE REQUIREMENTS

Find required performance level and choose installation method that meets or exceeds it. Performance results are based on ceramic tile meeting ANSI A137.1, or tile designated by tile manufacturer.

EXTRA HEAVY:

Extra heavy and high-impact use in food plants, dairies, breweries, and kitchens. Requires quarry tile, packing house tile, or tile designated by tile manufacturer. (Passes ASTM C627 cycles 1 through 14.)

HEAVY:

Shopping malls, stores, commercial kitchens, work areas, laboratories, auto showrooms and service areas, shipping/ receiving, and exterior decks. (Passes ASTM C627 cycles 1 through 12.)

MODERATE:


Normal commercial and light institutional use in public space of restaurants and hospitals. (Passes ASTM C627 cycles 1 through 10.)

LIGHT:

Light commercial use in office space, reception areas, kitchens, and bathrooms. (Passes ASTM C627 cycles 1 through 6.)

RESIDENTIAL:

Kitchens, bathrooms, and foyers. (Passes ASTM C627 cycles 1 through 3.)

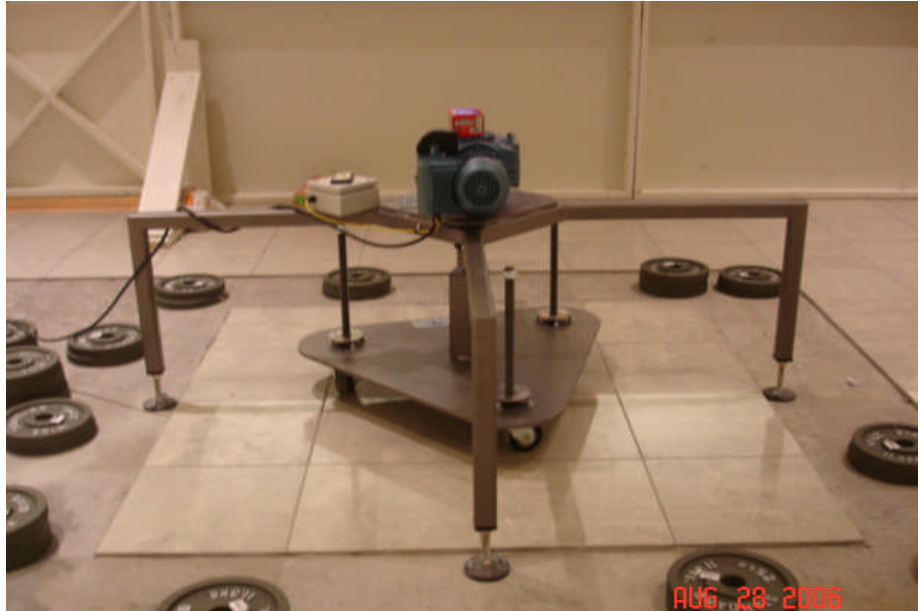

PROCON utilizes custom load testing equipment for more realistic, in-situ load testing of ceramic tile and stone floor assemblies

Ceramic and stone tile floor assemblies have become increasingly complex, and despite product manufacturer laboratory test data, it has become difficult to accurately predict the behavior and performance of these complex assemblies under realistic job-site conditions.

PROCON maintains specialized dynamic load testing equipment conforming to ASTM C627 test protocol that can be used to test and determine the performance rating of ceramic tile and stone floor assemblies in-situ prior to full-scale construction; this equipment is also a valuable forensic tool for determining cause / origin of tile and stone floor assembly defects

PROFESSIONAL CONSULTANTS INTERNATIONAL, LLC

Consulting Architects & Engineers

Construction Technology

30 Tower Lane

Avon, CT 06001

Office (860) 673-9529

Fax (860) 674-0094

email: info@proconweb.com

website: www.proconweb.com